MODULA MINI

Compact

Complete

Comfortable











Perfection is attained, not when no more can be added,

but when no more can be removed.

(Antoine de Saint-Exupéry, Terre des Hommes)





Mobility & Efficiency



O MODULA Mini – optimal price-performance ratio

MODULA Mini – our smallest mobile ENT treatment unit built into a compact casing. In spite of its small dimensions it is extendable

with additional accessories as of automatic secret emptying and flushing system, up to 3 LED light sources or with holders for




rigid or flexible endoscopes. MODULA mini is the best choice for a second treatment unit. It is transportable from one consulting room to the other.. If more space is needed an instrument cabinet is also available in the same design in order to store additional instruments.

Equipment & Colors

Standard equipment

- High quality electrolytic zincplated steel cabinet with soundproofing
- Extremely hard wearing with enamel finish with corrosion-resistant pretreatment
- Mobile on 4 antistatic heavy duty castors
- Electronic control and indication panel: glass display with 7 different function keys, 2 manometers (compressed air and vacuum)
- Swiveling holder for water handpiece, suction hose, compressed air handpiece
- Holder for headlamp (not switchable)
- Integrated mirror heater
- 3 fully extendable, self-closing drawers
- 3 removable disinfection quivers for rigid endoscopes, autoclavable

• Standard colors (antimicrobial coating with fine structure)

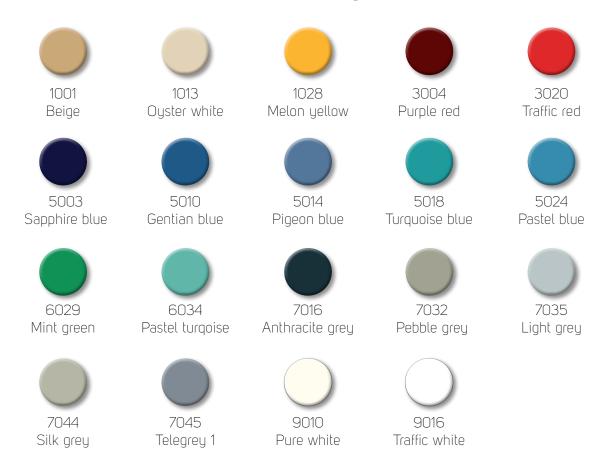

Technical details*



*(subject to modifications)

Power supply:	230 V (+/- 10%)
Frequency:	50/ 60 Hz
Current consumption:	max. 10 A
Power consumption:	max. 2,3 kVA
Classification:	lla
CE-Sign:	MEDCERT 0482
Protection class:	I
Degree of protection:	В
Compressed air (option):	12 L/min at 2700 RPM and 138 VA, 0,2 to 4,0 bar adjustable
Powered suction (option):	Oil-free vacuum pump (150 VA): suction performance 40 l/min, 0 to -0,85 bar, sensor switch for suction hose, electronic and mechanical safety overflow system with antibacterial filter
Ear rinsing system (option):	37°C +/- 1°C, 500 ml/min, max. 1500 VA (long-lerm usage)
Autonomous ear rinsing system (option):	37°C +/- 1°C, 500 ml/min, max. 550 VA (long-term usage)
Watertank (option):	5 liter
Weight:	approx. 60 kg
Ambient temperature:	Temp. +15°C to +35°C

Contact

G. Heinemann Medizintechnik GmbH

Gruetzmuehlenweg 44

22339 Hamburg

Germany

Phone.: +49 (0)40 - 538 904 0

Fax: +49 (0)40 - 538 62 55

Email: info@heinemann-ent.de

Web: www.heinemann-ent.de

